

Precision Steel

precidur[®] C15/C15E

Product information for hot-rolled precision strip made in Hohenlimburg



thyssenkrupp

Version 9/21

Case hardening steel

Case hardening steels from BU Precision Steel are produced in accordance with DIN EN 10084 and permit the combination of hard, wear-resistant surfaces and high core toughness.

Close analysis ranges tailored to specific purposes and precisely controlled rolling parameters guarantee consistent and outstanding processability.

Contents

Brief portrait
Technical features
Chemical composition
Mechanical properties
General thickness tolerances
Delivery options
Application examples

precidur[®]

- is used in virtually all industry sectors.
- offers close thickness tolerances similar to cold-rolled strip, optimum surface finishes and consistent material properties over the entire strip length and width.
- is characterized by its symmetrical strip profiles and mill edges.
- is the sum of all the experience we have gained in more than 100 years of manufacturing and processing steel.

Technical features

Case hardening steel

Material number: 1.0401 / 1.1141

Proprietary brand: precidur® C15 / C15E

Delivery specification: DIN EN ISO 683-3, DIN EN 10084

Application: Einsatzstahl für den Fahrzeug-, Maschinen- und Anlagenbau

Chemical composition

Ladle analysis mass percentages	C [%]	Si [%]	Mn [%]	P [%]	S [%]	Cr [%]	Mo [%]	Ni [%]	Al [%]	Cu [%]
min.	0,12	-	0,30	-	-	-	-	-	-	-
max.	0,17	0,40	0,60	0,025	0,015	0,30	0,10	0,20	0,015*	0,20

Further special analyses available

*Al killed variant available

Mechanical properties

Longitudinal to rolling direction	Tensile strength R _m [MPa]	Elongation A ₅ [%]	A ₈₀ [%]
Rolled condition	520	min. 25	min. 22
GKZ annealed	460	min. 30	min. 28

Possible delivery options

Options	Mill edge (NK) Cut edge (GK)	pickled	unpickled	slit	trimmed	cut to length	annealed	not annealed
precidur® C15/C15E	NK or GK	✓ or	✓	✓	✓	✓	✓	✓

General thickness tolerances

Strip thickness [mm]	1.5 – 2.54	2.55 – 4.03	4.04 – 6.03	6.04 – 8.03	8.04 – 9.03	9.04 – 11.03	11.04 – 14.03	14.04 – 16.00
Standard tolerances [mm]	± 0.04	± 0.04	± 0.05	± 0.055	± 0.06	± 0.07	± 0.08	± 0.10
Special tolerances [mm]	± 0.03	± 0.035	± 0.04	± 0.045	± 0.05	± 0.055	± 0.06	± 0.07

General delivery options

Coil inner diameter: standard 508 mm / optional 610 mm

Coil outer diameter: max. 1,890 mm


Coil weight: max. 20.5 kg/mm strip width

Strip width*: max. 720 mm

Strip thickness*: 1.5 – 16 mm

* May be subjected to restrictions.

Application examples for case hardening steel

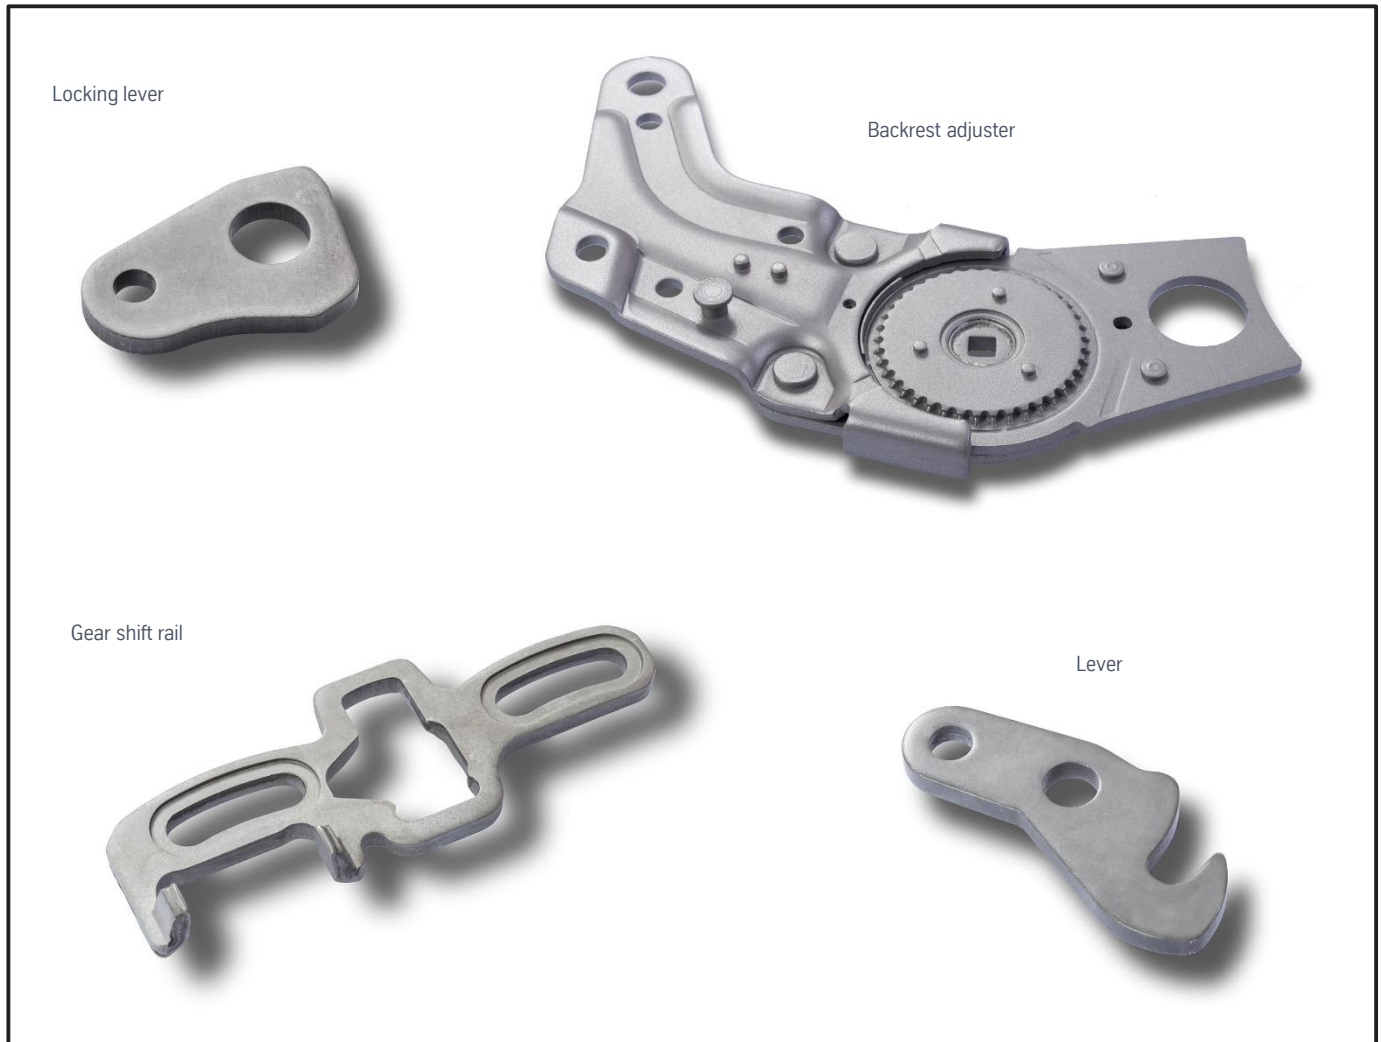

Special mill grades feature unique thyssenkrupp properties. Other terms and conditions of supply not specified here will be based on the applicable specifications. The specifications used will be those valid on the date of publication of this product information.

General information:

All statements as to the properties or utilization of material and products are for the purpose of description only. Guarantees in respect of the existence of certain properties or utilization are only valid if agreed in writing. Subject to technical changes. Reprints, in whole or in part, only with the permission of thyssenkrupp Hohenlimburg GmbH. The latest version of this product information can be found at: <https://www.thyssenkrupp-steel.com/en/publications/>

Please contact our sales/technical customer support team for detailed information.

thyssenkrupp Hohenlimburg GmbH, Oeger Str. 120, 58119 Hagen
T: +49 2334 91 2555
www.thyssenkrupp-steel.com, info.precisionsteel@thyssenkrupp.com